HITEC ARMS / MEAN ARMS INTEGRALLY SUPPRESSED SYSTEM

9mm Ported Barrel

Specifications:
Calor: Black In Color From Nitride
9mm x 19 Cold Hammer Forged Steel
16 Fluted Chamber
18X1 Metric Thread Pitch
Barrel Is 5.74" In Overall Length
Weight 7.0 oz.

9 inch or 12 inch Supprressor

Specifications:
Color: Hard anodized Black internals
Material: 6061 Aluminum
Treatment: Hard anodized throughout the
silencer tube
Mounting: Direct thread, M18 x 1 SD-type
Compatibility: MP5SD, APC9 SD and
compatible SD type barrels
User Serviceable with spanner wrench tools
Lifetime Warranty







HITEC ARMS

10860 SWITZER AVE, STE 105 DALLAS, TX 75238

12 inch SD Suppressor

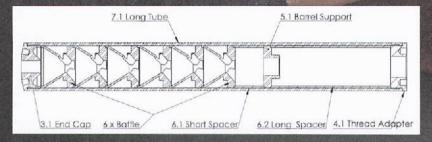

9 inch SOK Suppressor



Cleaning and maintenance

Clean barrel parts with SD port brush every 500-700 rounds

One of the most effective methods for cleaning a suppressor is using a simple brush and solvent. This technique is gentle and likely utilizes tools you already have. While it might take some time, you can reach intricate areas without damaging the suppressor. To use this method, you'll need:

- A scrubbing brush (non-metallic recommended)
- A pick (toothpick, punch, flat-head)
- · A cloth (terry cloth, microfiber, paper towel)
- A noncorrosive solvent (e.g., diluted Simple Green, Hoppes #9, or CLP)

First, disassemble your suppressor. Sook the tube and baffles in your solvent mixture for a few hours (or overnight for maximum effectiveness). The next day, brush or wipe away any leftover residue, then reassemble the suppressor.